


SPECIFICATION SHEET

QUIET CONNECT™ Series RS125

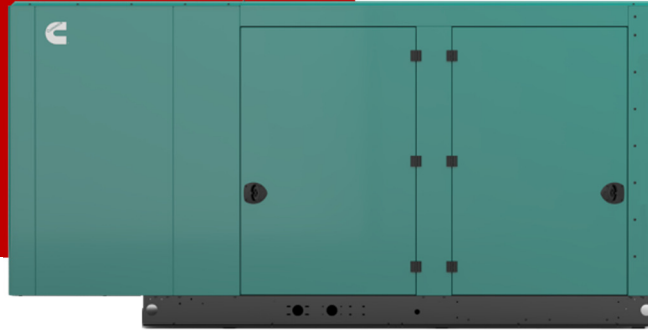

Features and Benefits

Robust product design and testing - The generator is designed to operate under extreme environmental conditions including cold weather starts at as low as -40° F. The generator is tested and certified per the latest EPA, UL and IBC Seismic standards and is capable of meeting NFPA 110 requirements when equipped with the necessary accessories and properly installed.

Flexible exercise mode - The innovative, flexible exercise mode enables the generator to exercise at a time, frequency and duration that suits the customer's preference - as little as 2 minutes every 6 months - reducing unnecessary fuel consumption, emissions and noise.

Advanced enclosure design - The aesthetically appealing enclosure incorporates special designs that deliver the quietest generator of its kind. Aluminum material plus durable powder coat paint provides the best anti-corrosion performance. The generator set enclosure has been evaluated to withstand 180 mph wind loads in accordance with ASCE 7-10. The design has hinged doors to provide easy access for service and maintenance

Control system - The PowerCommand® electronic control is standard equipment and provides total generator set system integration including automatic remote starting/stopping, precise frequency and voltage regulation, alarm and status message display, output metering, auto-shutdown at fault detection and NFPA 110 level 1 compliance.

Self-diagnostics and easy service - The PowerCommand® electronic control provides industry-leading self-diagnostic capabilities. In addition, critical components of the generator are designed to ensure service and preventive maintenance can be completed in a short period of time.

Weight, Size and Sound Level

Weight: 3915 lbs. (1776 kgs)²

Size: Length 143.0 in (3621 mm), width 40.0 in (1016 mm), height 72.0 in (1836 mm)

Sound: 75 dB(A) at 23 ft. (7 m) with sound level 1 enclosure

Series	Model	Phase	Voltage (V)	Frequency (Hz)	Rated amp ¹ (NG / LPV)	Circuit Breaker (Amps)
RS125	C125N6	1	120 / 240	60	520.8 / 520.8	600
		3	120 / 208	60	433.6 / 433.6	600
		3	277 / 480	60	187.9 / 187.9	250
		3	120 / 240	60	375.8 / 375.8	400

¹ Derating guidelines: Engine power available up to 1800 m (5900 ft.) and ambient temperatures up to 40° C (104° F). Above these conditions, derate at 4.25% per 300 m (985 ft.) and 2% per 10° C (18° F)

² Weight above is average. Actual weight varies with product configuration

Product Features

Engine

- Natural gas / Propane
- Engine air cleaner – normal duty
- Electronic governor, isochronous
- Engine starter, 12 VDC motor
- Shutdown – low oil pressure
- Extension – oil drain
- Engine oil – included

Fuel System

- Single fuel – natural gas or propane vapor, field selectable

Alternator

- 60 Hz, 1 phase, 4 lead, or 3 phase, 12 lead, 120° C temperature rise at 40° C ambient
- Exciter/Voltage regulator – torque match

Control

- PowerCommand 23
- Display language – English
- Control mounting, left facing

Electrical

- Single circuit breaker, UL certified, right side mounted
- Battery charging alternator
- Battery charger – 6 Amps

Cooling

- Generator set cooling capacity – 50° C
- Shutdown – low coolant level
- Engine coolant – 50/50 mixture
- Extension – coolant drain

Enclosure

- Aluminum enclosure Sound Level 1 with muffler installed, green color
- Wind rating – 180 mph

Code Compliance

- UL 2200
- EPA emissions, stationary emergency, 40CFR60
- IBC Seismic
- NFPA 110 capable

Generator set application

- Coolant heater
- Battery rack
- Literature (English) – Operator's manual, Installation manual

Packaging

- Shipping pallet

Generator Set Performance

Governor regulation class: ISO 8528 Part 1 Class G2

Voltage regulation, no load to full load: ±1.0% **Random voltage variation:** ±1.0%

Frequency regulation: Isochronous

Random frequency variation: ± 0.25% @ 60 Hz **Radio frequency emissions compliance:** FCC code Title 47 part 15 Class B

Engine Specifications

Design: Turbocharged and aftercooled

Bore: 114.1 mm (4.49 in)

Stroke: 144.5 mm (5.69 in)

Displacement: 8.9 liters (543 in³)

Cylinder block: Cast iron, in-line 6 cylinder

Battery capacity: 850 Amps at ambient temperature of 0° F to 32° F (-18° C to 0° C)

Battery charging alternator: 100 Amps **Starting**

voltage: 12-Volt, negative ground **Lube oil filter**

type(s): Spin-on with relief valve

Standard cooling system: 50° C (122° F) ambient cooling system

Rated speed: 1800 rpm

Fuel Supply Pressure

Minimum - in H2O (kPa): NG 6.0 (1.5)

Maximum - in H2O (kPa): NG 13.0 (3.5)

Warranty

Base warranty – 2-year standby

Extended warranties available

Typical Fuel Consumption

Fuel consumption – Natural Gas

Load	1/4	1/2	3/4	Full
ft ³ /hr.	652.0	981.3	1305.8	1665.6
m ³ /hr.	18.46	27.79	36.98	47.17

Fuel consumption – Propane

Load	1/4	1/2	3/4	Full
ft ³ /hr.	262.8	383.7	517.3	674.1
m ³ /hr.	7.44	10.87	14.65	19.09


Conversion factor:

8.58 ft³ = 1 lb.

0.535 m³ = 1 kg

36.39 ft³ = 1 gal

Basic Dimension

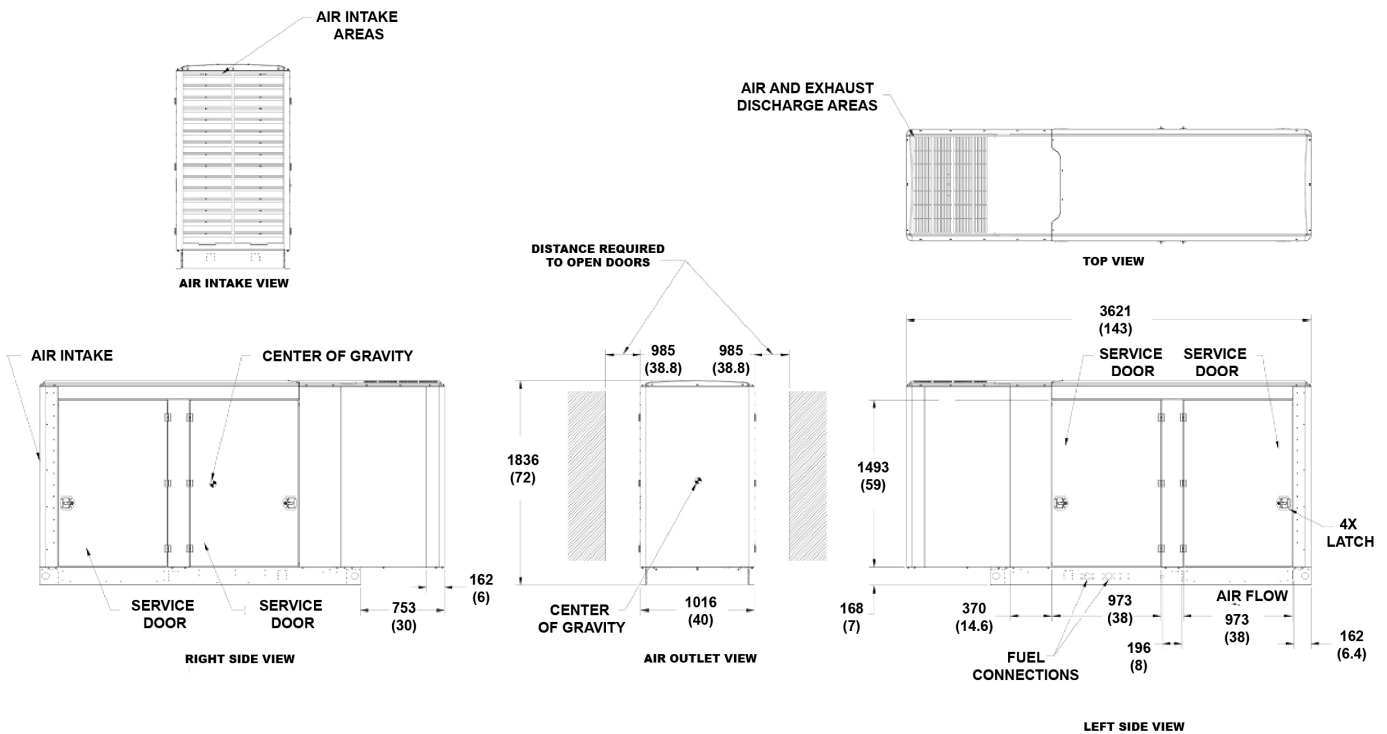

Note: This outline drawing provides general reference only and is not intended for use in design or installation. For more information, see Operators and Installation manuals or contact your dealer for assistance.

Accessories

- Remote displays
- Auxiliary output relays (2)
- Auxiliary configurable signal inputs (8) and relay outputs (8)
- Annunciator – RS 485
- Internet monitoring device – PowerCommand 500/550
- Battery charger – stand-alone, 12V
- Enclosure Sound Level 1 to Sound Level 2 upgrade kit
- Enclosure paint touch up kit
- Base barrier – elevated generator set
- Alternator heater
- Maintenance and service kit



⚠ WARNING:

Standby rating based on: Applicable for supplying emergency power for the duration of normal power interruption. No sustained overload capability is available for this rating. (Equivalent to fuel stop power in accordance with ISO3046, AS2789, DIN6271 and BS5514 nominally rated.) See T030.

⚠ WARNING:

Back feed to a utility system can cause electrocution and/or property damage. Do not connect to any building electrical except through an approved device or after building main breaker is open.

Transfer Switch (sold separately)

- Automatic Transfer Switches available at various amperages. (Refer to S-1639)
- Service Entrance and Non-Service Entrances models are available.
- Available for both indoor and outdoor applications.
- All models listed to UL 1008 standard.
- Compatibility with Cummins generator set helps reduce the installation time for the complete application.

Warranty Policy

Cummins RS liquid cooled generator set models come with a 2-year base warranty when used in EPA-Stationary Emergency application. Extended warranty options are available.

Please contact your Cummins dealers for details

After Sale Support

Largest dealer support network

Cummins generator sets are supported by the best trained and certified dealer network in the industry. This network of knowledgeable dealers will help you select the right generator for your application and advise you on associated accessories for your generator. Cummins dealers can also help answer any questions you may have regarding operation and maintenance requirements of the generators. Certified dealers also offer a complete selection of commonly used generator set maintenance parts and manuals.

Manuals: Operation and installation manuals ship with the generator set. To obtain additional copies or other manuals for this model, see your dealer. To easily locate the nearest certified dealer for Cummins generators in your area, or for more information, contact us at 1-800-344-0039 or visit power.cummins.com.

Contact your dealer for more information.

Cummins Inc.
Box 3005
Columbus, IN 47202-3005
U.S.A

1-800-CUMMINS™ (1-800-286-6467)
cummins.com

NAS-6309-EN (7/21)

©2021 Cummins Inc.

